

FIG. 1

FIG. 2

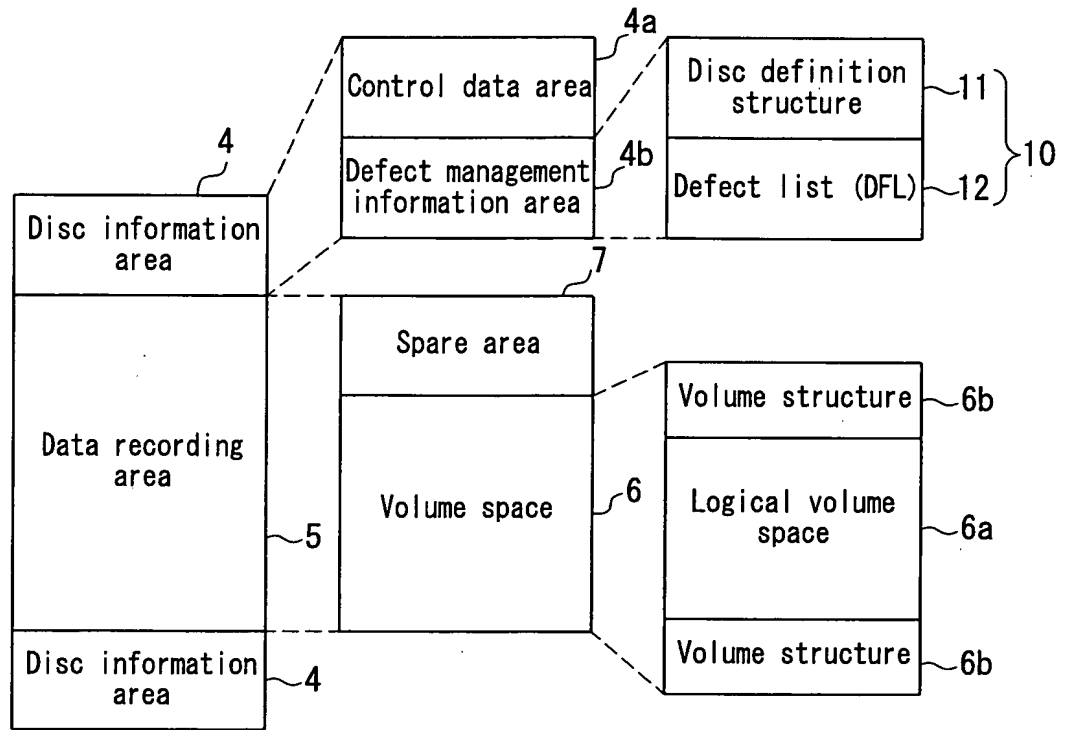


FIG. 3

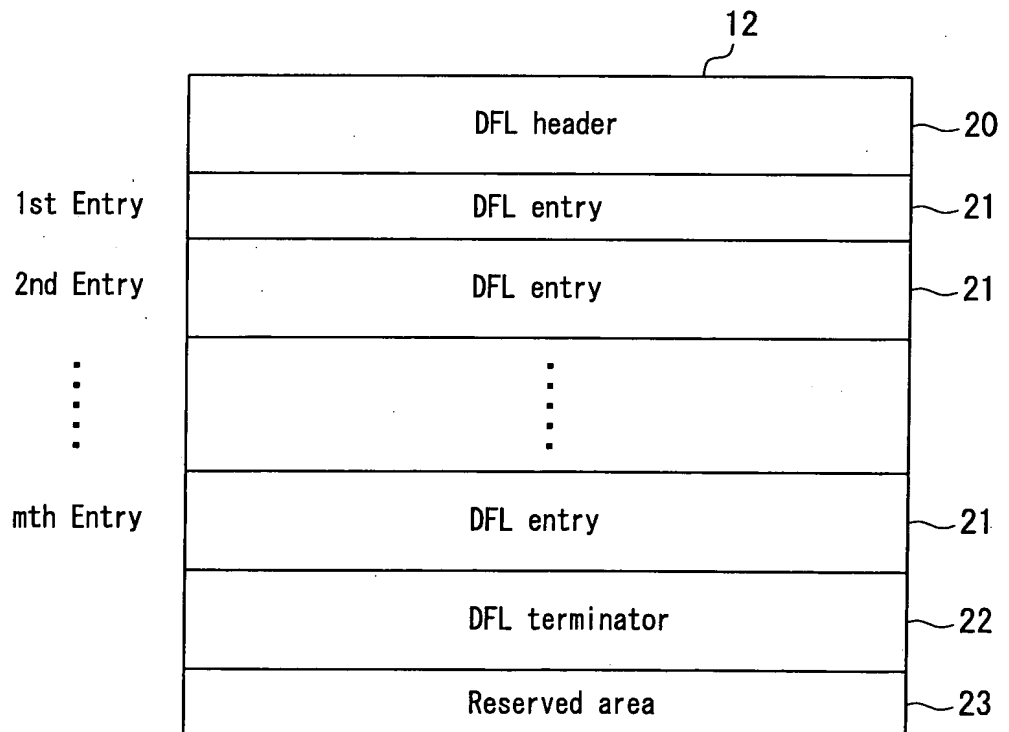


FIG. 4

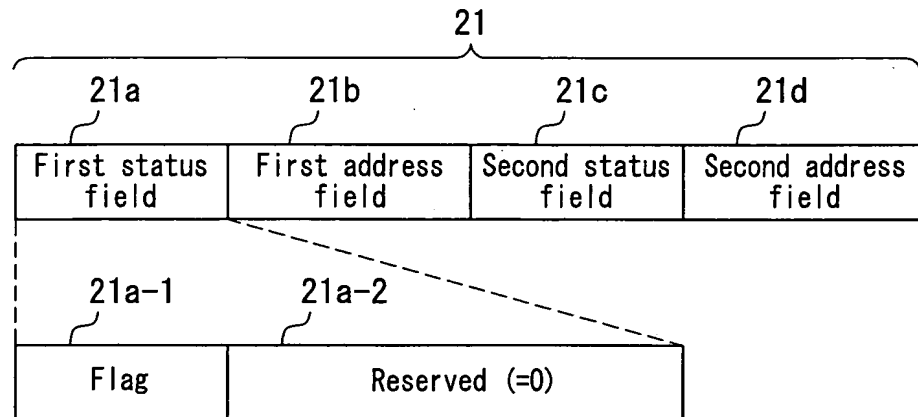


FIG. 5A

| Flag  | Definition  |
|-------|---|
| 0000  | A substitute cluster is allocated to a defective cluster, the data of the defective cluster is recorded in the substitute cluster         |
| 1000  | A substitute cluster is allocated to a defective cluster, but the data of the defective cluster is not recorded in the substitute cluster |
| 0001  | No substitute clusters are allocated to defective clusters  |
| 0010  | Invalidated DFL entry<br>(the second address field shows locations that can be used as substitutes)                                       |
| :     | :   |
| Other | (Undefined)   |

FIG. 5B

| Flag  | Definition  |
|-------|---|
| 0000  | Second status field unused                          |
| 1000  | Defective clusters have been physically reformatted |
| Other | (Undefined)   |

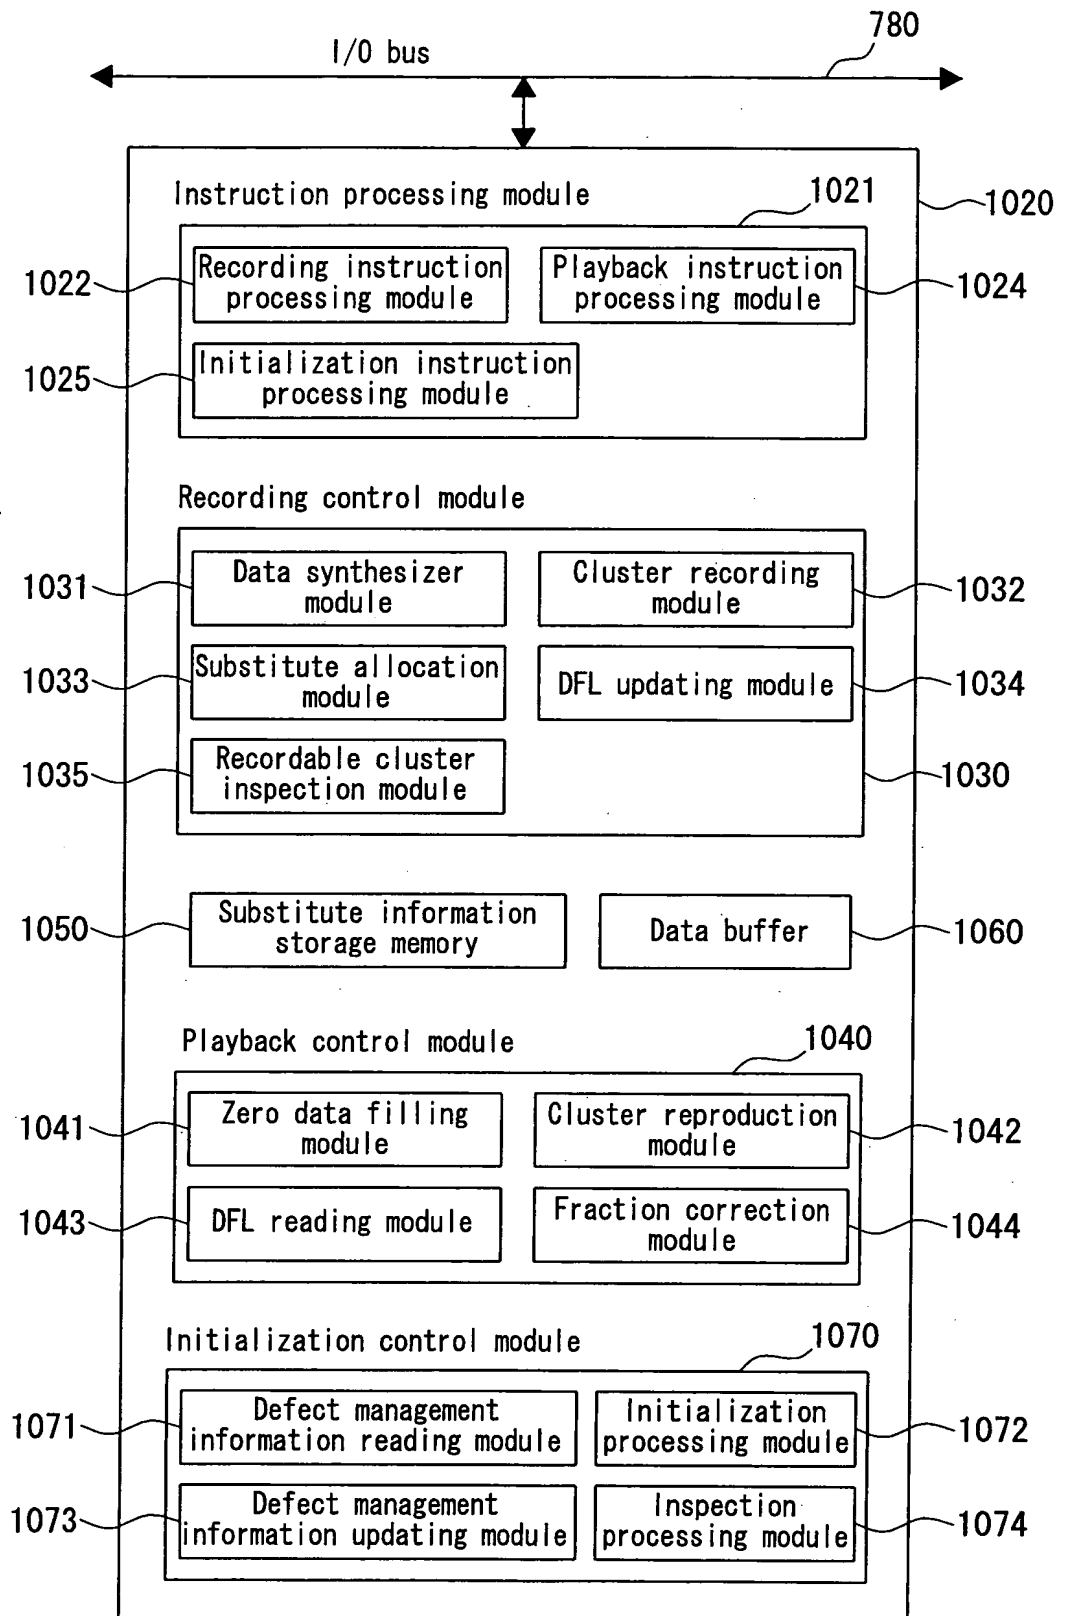


FIG. 6

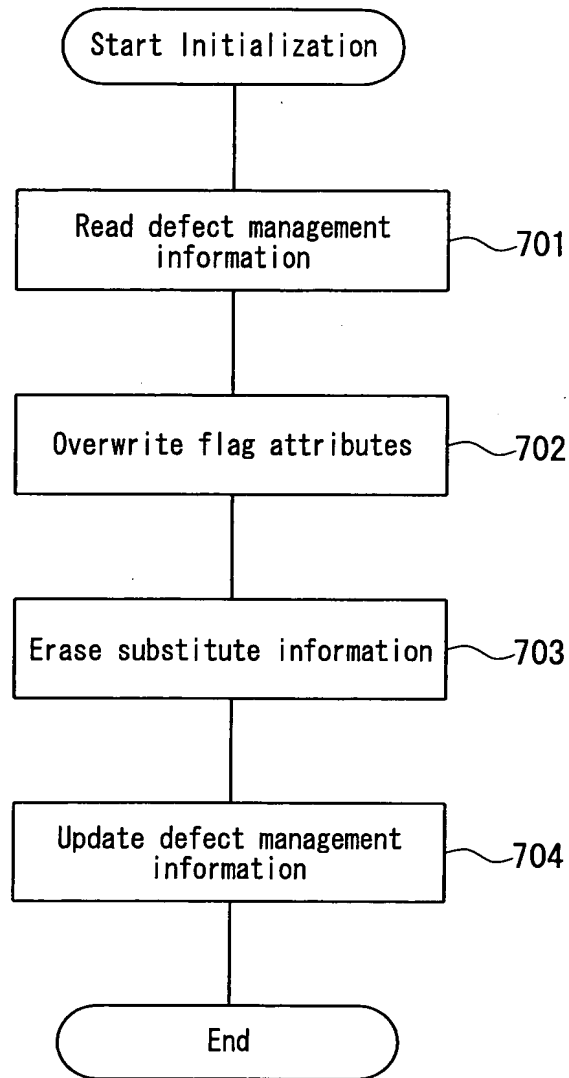


FIG. 7

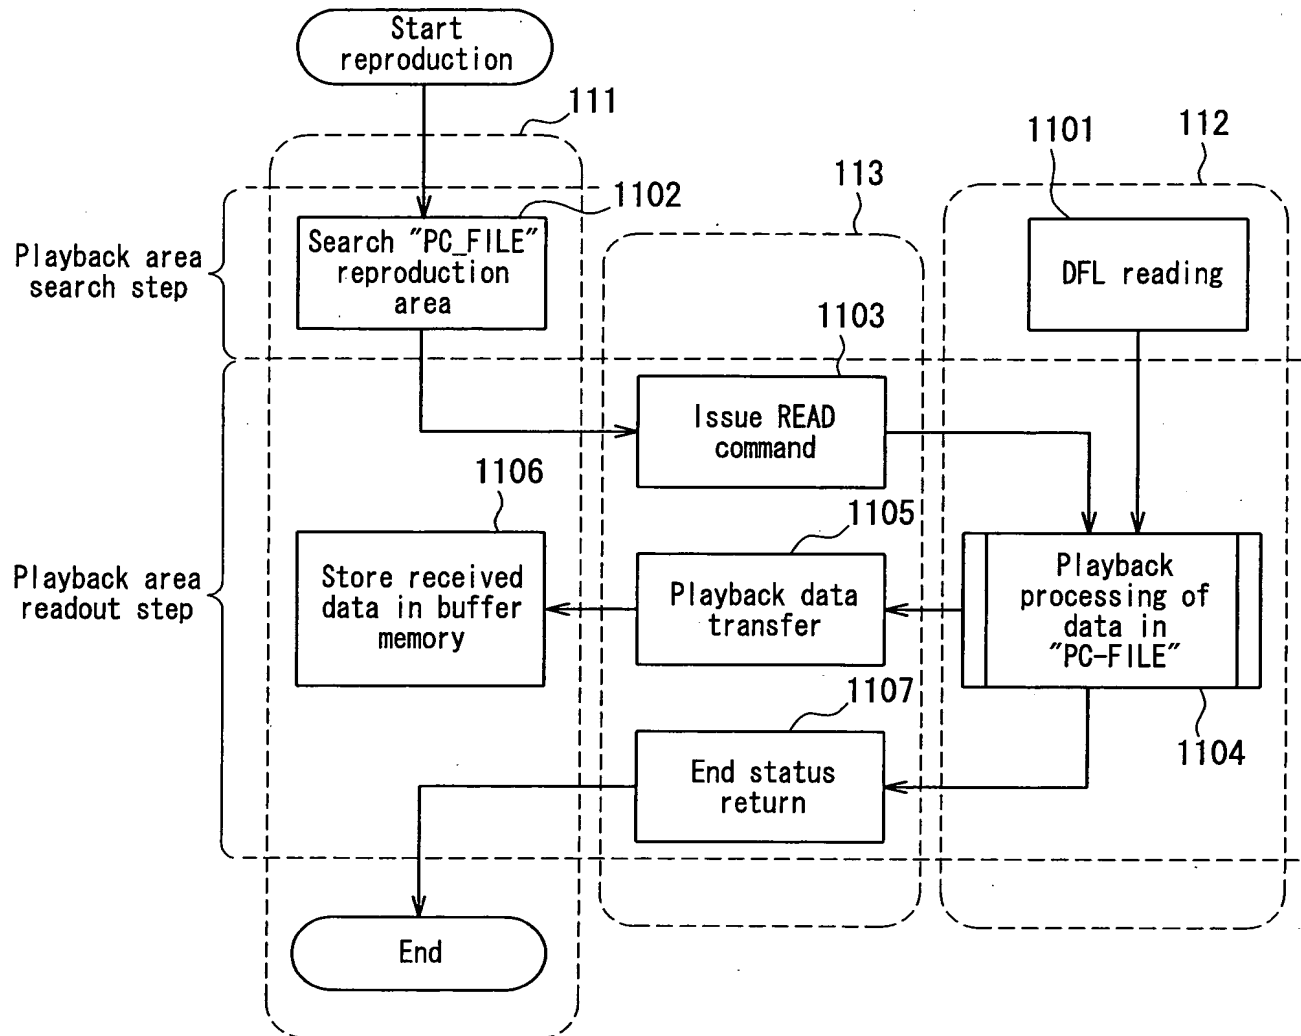


FIG. 8

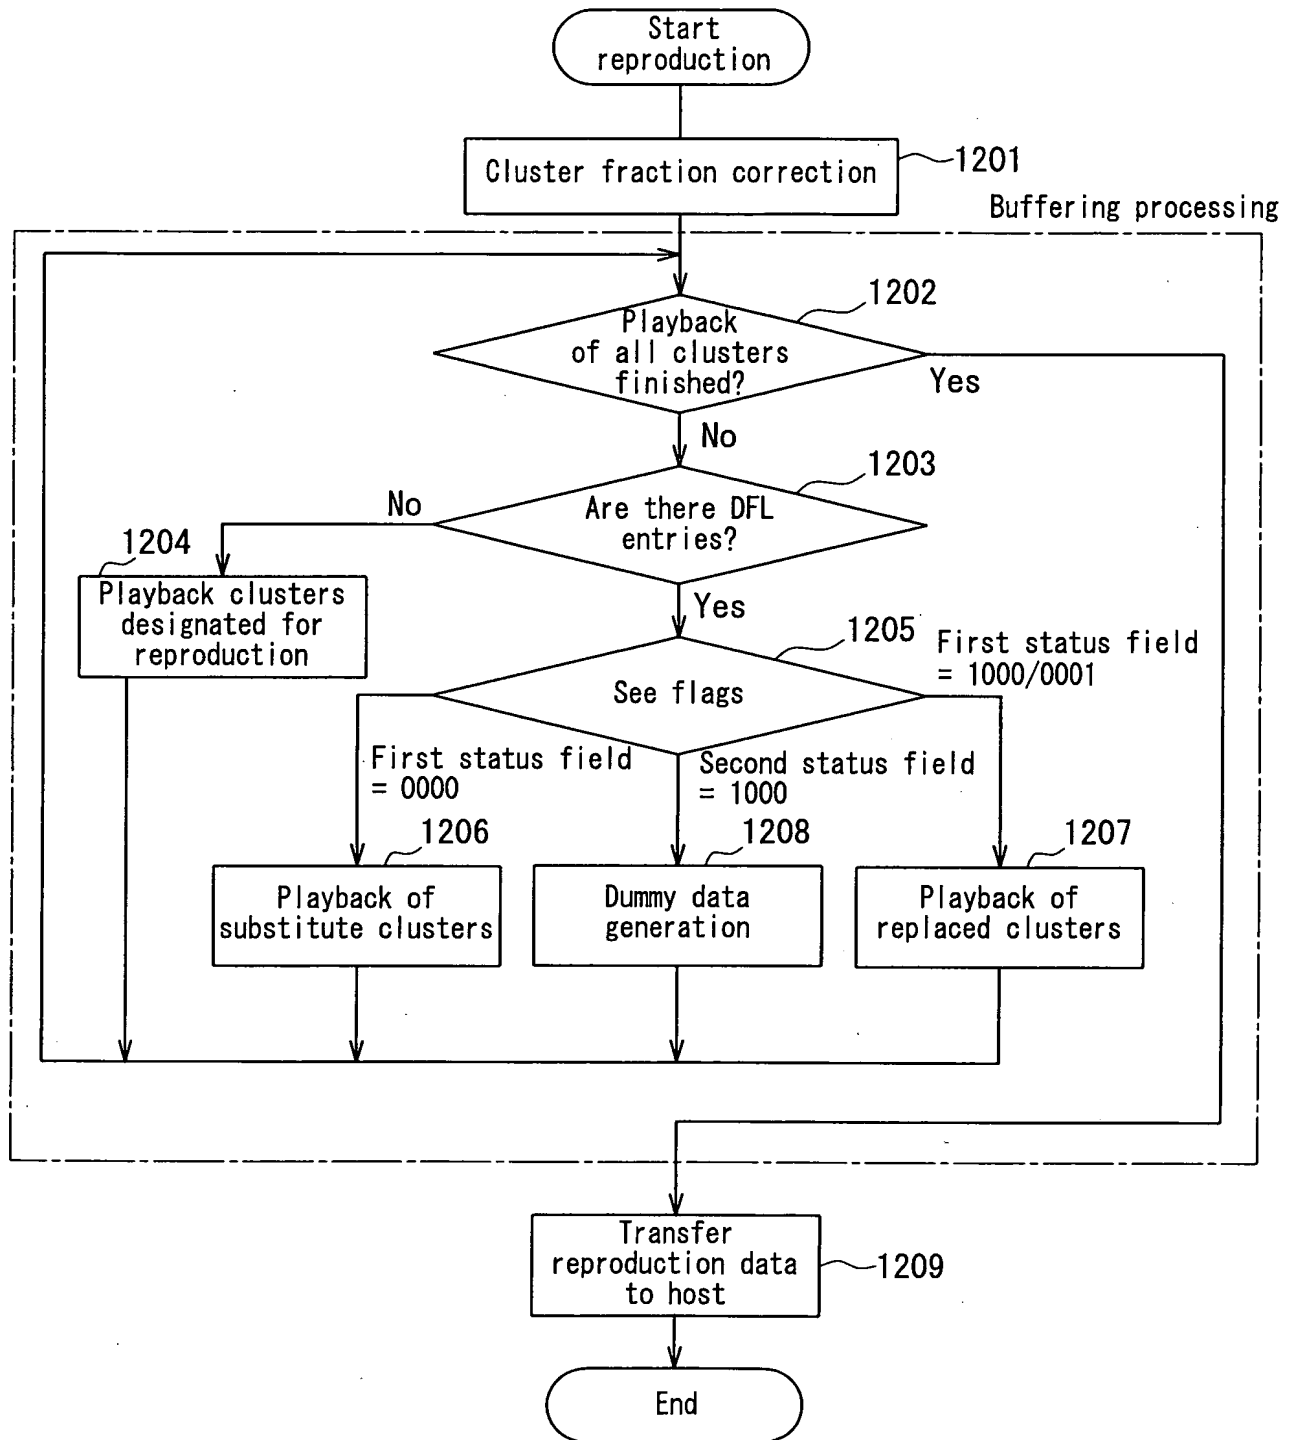


FIG. 9

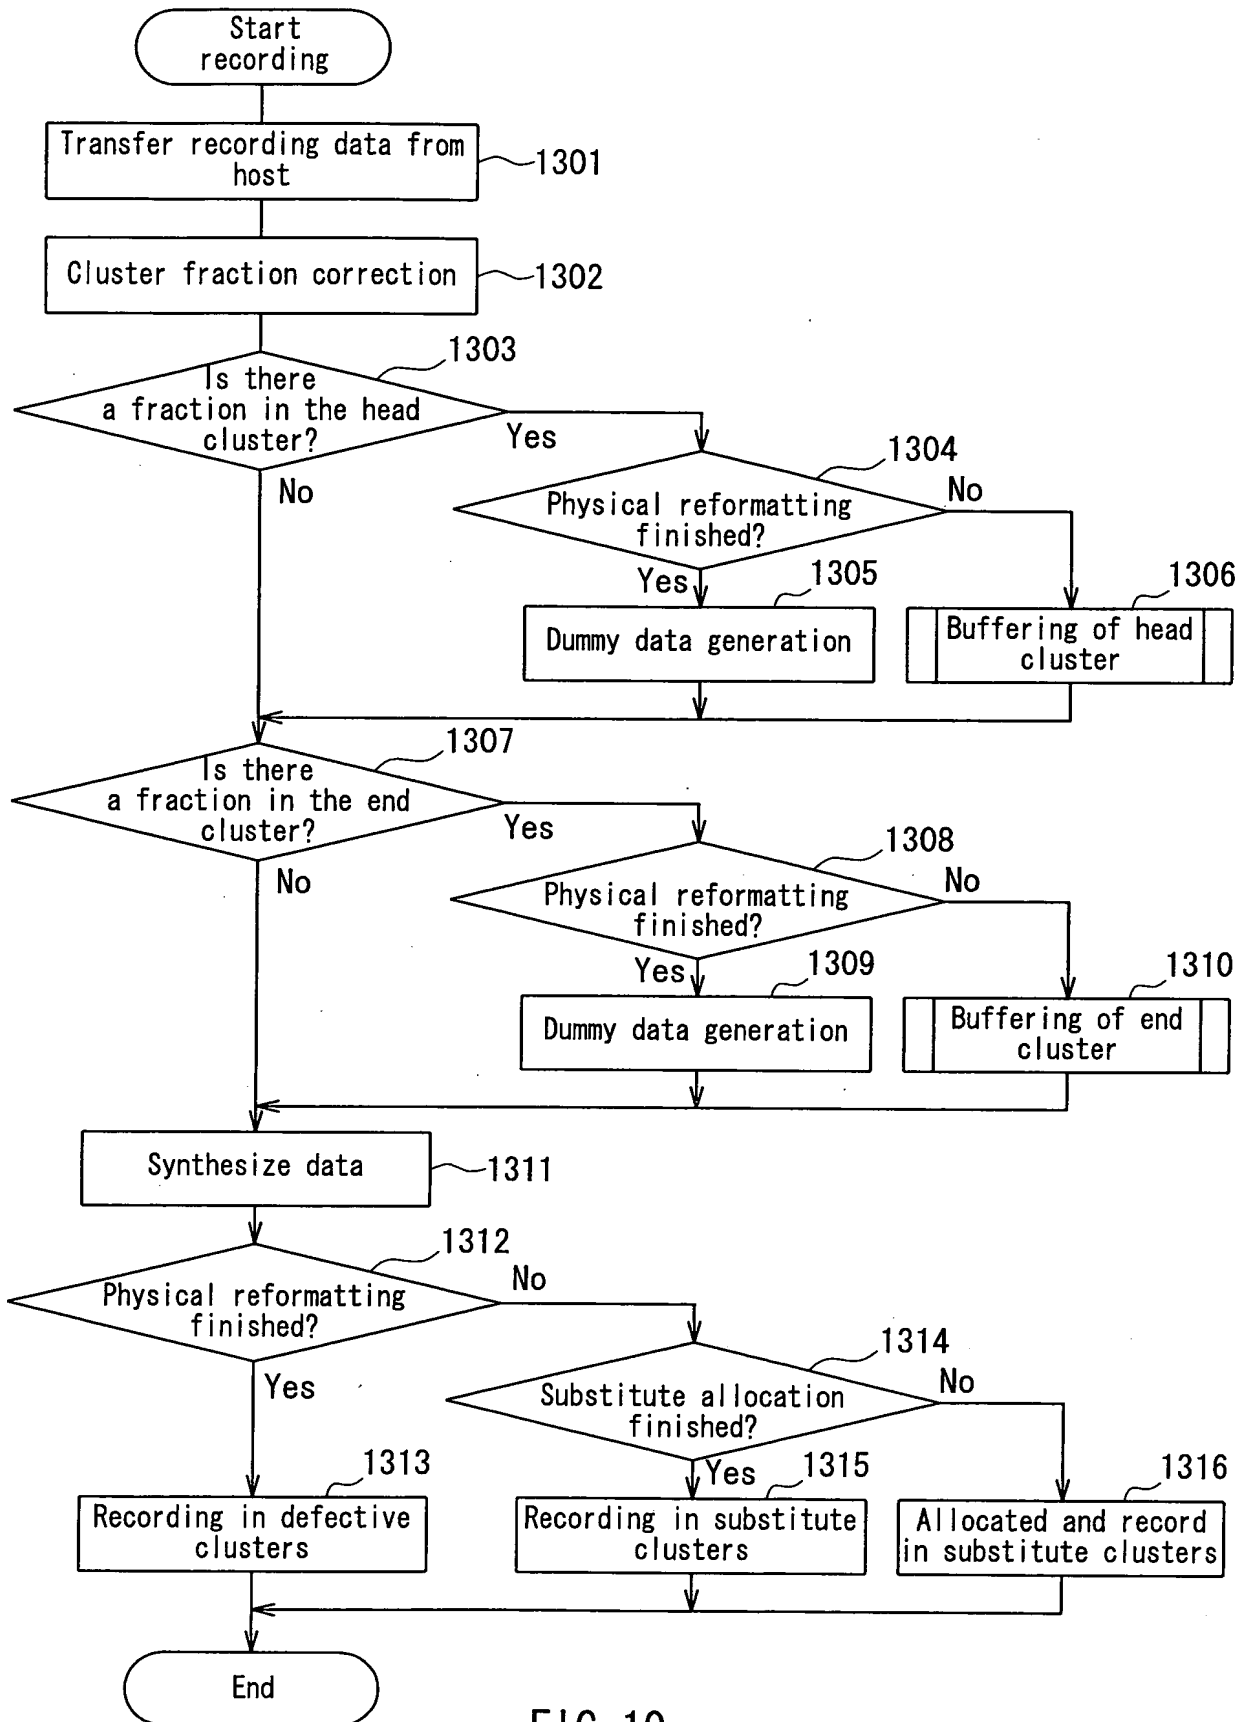


FIG. 10



FIG. 11

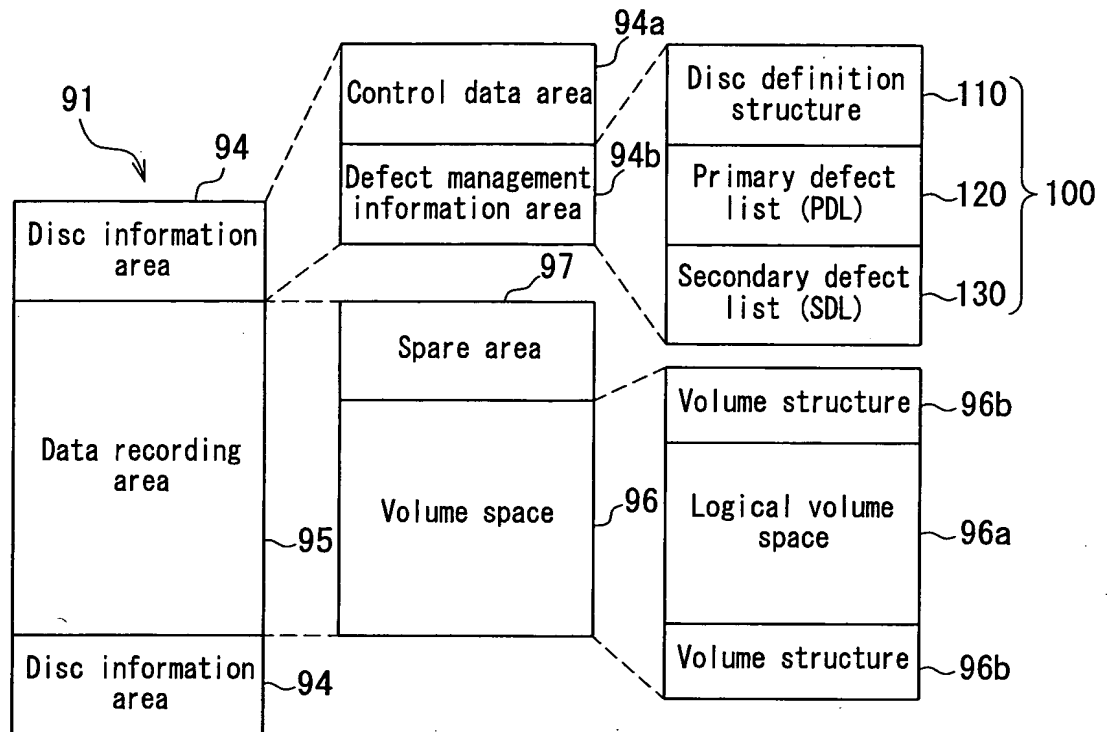


FIG. 12

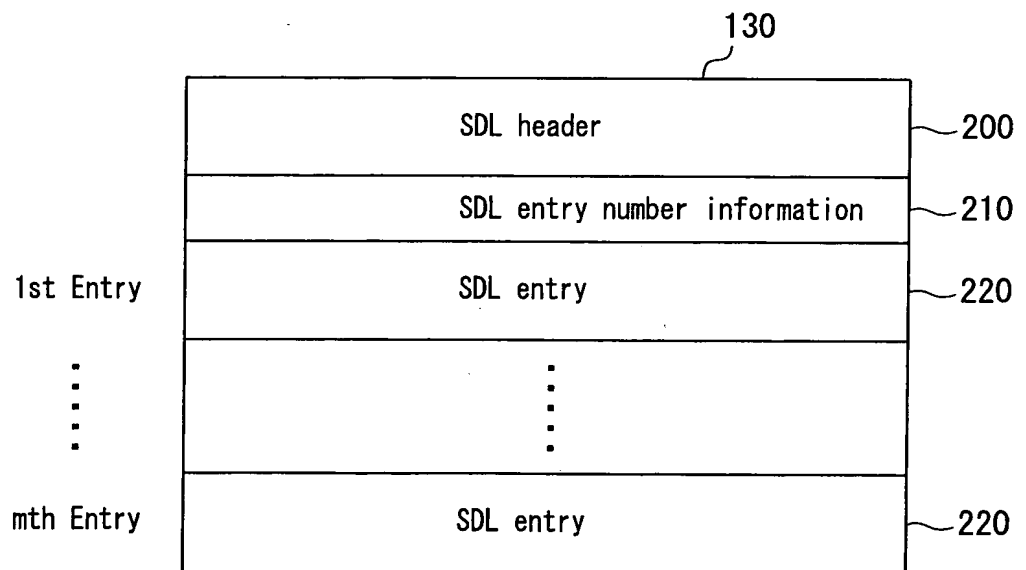


FIG. 13

